



Phone: 603-524-3714  
 Fax: 603-524-6602  
 Website: www.thermshield.com  
 Email: info@thermshield.com




**Notes:**

For vertical mounting with optional solderable tabs  
 Black Anodize  
 Thermal Resistance: 19 °C /W  
 Thermal resistance value is based on a 75°C rise in natural convection

TS-54060-AD (NO TABS)

TS-54060-ADVT ( VERTICAL TAB OPTION)

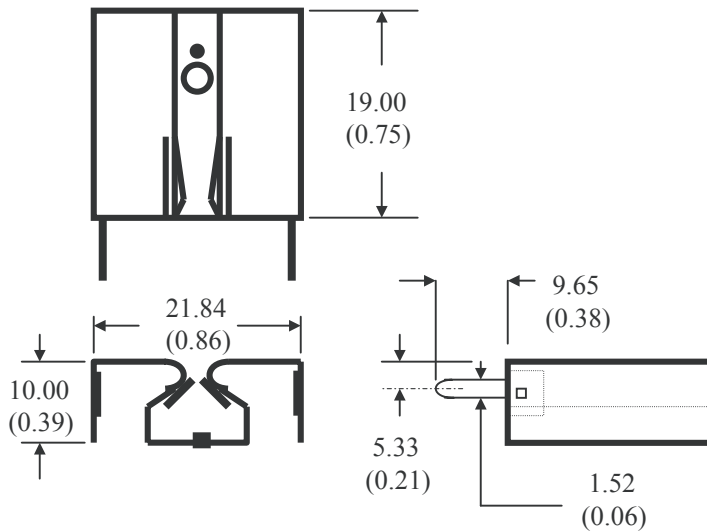

**THERMAL PERFORMANCE - TS-54060-AD / ADVT**  
 AIR VELOCITY - FT. PER MINUTE

